

**Roll-in Proofer -- Pass Through, 4 Door, 75.5" Wide**

**LRP2S-130P to -240P Series**



**Model LRP2S** (rack not included)

**Rack Capacity:**

Model	Side Load	End Load	Double
LRP2S-130P	12	12	6
LRP2S-140P	14	12	6
LRP2S-150P	14	14	8
LRP2S-160P	16	14	8
LRP2S-170P	16	16	8
LRP2S-180P	18	16	10
LRP2S-190P	18	18	10
LRP2S-200P	20	18	10
LRP2S-210P	20	20	12
LRP2S-220P	22	20	12
LRP2S-230P	22	22	12
LRP2S-240P	22	22	14

**Short Bid Specification:**

Proofer shall be an **LBC Bakery Equipment Model LRP2S-\_\_\_** (insert 130P, 140P, 150P, 160P, 170P, 180P, 190P, 200P, 210P, 220P, 230P or 240P to indicate desired depth). Appliance shall be electrically heated with four doors, a quick response air-wash heat and humidity system and modular foam-insulated panel construction. Interior shall be 300 series stainless steel with perimeter bumpers to protect doors and walls. Doors shall have magnetic seals, automatic closers and full-width protective bar handles. Computerized controller(s) shall be door mounted at eye-level and have accurate LED displays for Time, Temperature and Humidity. Complete appliance shall have all listed features and, if selected, optional 300-series stainless steel floor and/or 72610-48 water filtration system.

**Standard Product Warranty:**

One Year Parts and Labor (Contiguous US, Alaska, Hawaii & Canada)

**Construction Features:**

- Heavy duty stainless steel exterior with 300 series stainless steel interior and aluminized steel top
- Foam insulated walls, ceiling and doors
- Modular wall and ceiling panels with cam interlocks
- Tubular heaters; non-submerged to extend life
- Lighted interior
- Inner bumpers protect interior walls and doors from damage
- 120/208VAC or 120/240 VAC, 1- or 3-phase, field convertible

**Performance Features:**

- Rapid responding air-wash heat and humidity system
- Proofing Heat Range: 70 - 120 deg F
- Humidity Range: 50 - 99%
- PID-type controller design to ensure rapid and accurate response without overshoot

**Controls Features:**

- All controls mounted in the door at eye-level
- Large LED displays for Time, Temperature and Humidity
- Five unique timers to manage multiple products simultaneously

**Option:** Rugged 300-series stainless steel floor

**Accessory:** 72610-48 Water Filtration System



Meets UL 197 and NSF 2 Standards

Sheet Number LRP2S-130P-240P (Rev C 11/16)

## Roll-in Proofer -- Pass Through, 4 Door, 75.5" Wide


LRP2S-130P to -240P Series

### Installation Requirements:

- Ships knocked down. Requires on-site assembly
- Appliance is designed to operate at normal room temperatures
- Appliance may require external support
- Clearance to combustibles is 0" at sides
- For installation on non-porous surfaces only
- Floor must be level to within 1/8" per foot. Difference for entire floor must not exceed 3/4".
- NOTE: Deeper units require two power supplies. Refer to table below.
- Water Supply: 1/2 NPT connection on appliance side, cold water, filtered. NOTE: Deeper units require two water supplies.

**Option:** Stainless steel floor

**Accessory:** 72610-48 Water Filtration Assembly

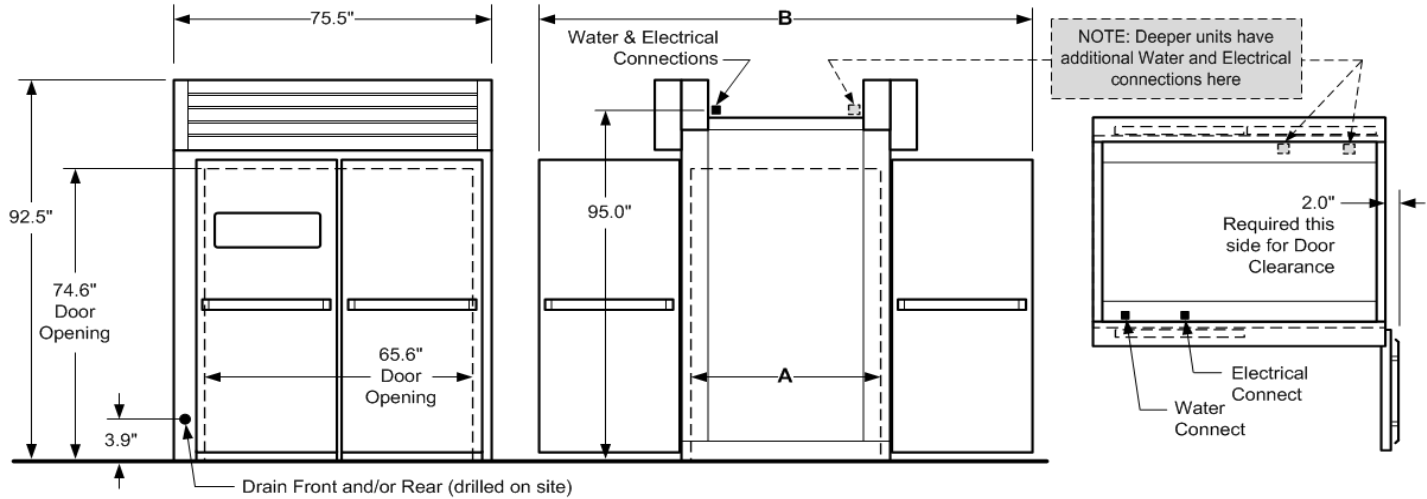

### Dimensions:

Model	Dim A (in)	Dim B (in)
LRP2S-130P	124.5	200.0
LRP2S-140P	134.5	210.0
LRP2S-150P	144.5	220.0
LRP2S-160P	154.5	230.0
LRP2S-170P	164.5	240.0
LRP2S-180P	174.5	250.0
LRP2S-190P	184.5	260.0
LRP2S-200P	194.5	270.0
LRP2S-210P	204.5	280.0
LRP2S-220P	214.5	290.0
LRP2S-230P	224.5	300.0
LRP2S-240P	234.5	310.0

### Shipping info:

Actual	Shipping	Freight Class
3067	3167	85
3239	3339	
3321	3421	
3847	3947	
3929	4075	
4101	4201	
4183	4283	
4355	4455	
4437	4537	
4609	4709	
4781	4881	
4953	5053	

### Electrical Requirements:

Model	Voltage	Phase	Total kW	MCA		MOP	
				Front	Rear	Front	Rear
LRP2S- (130P to 150P)	208 VAC	3	5.0	35	NA	60	NA
	240 VAC		6.6	35	NA	60	NA
LRP2S- (160P to 240P)	208 VAC		10.2	35	35	60	60
	240 VAC		13.2	35	35	60	60

### Water Quality Requirements:

Alkalinity < 22 ppm	Magnesium < 0.65 ppm
Aluminium < 17 ppb	pH = 8.5
Calcium < 3.3 ppm	Sodium < 8.5 ppm
Free Chlorine Residual < 0.6 ppm	Total Hardness < 11.9 ppm