


**Roll-In Proofer for LMO Max Oven Rack**

**LRP Max-1**

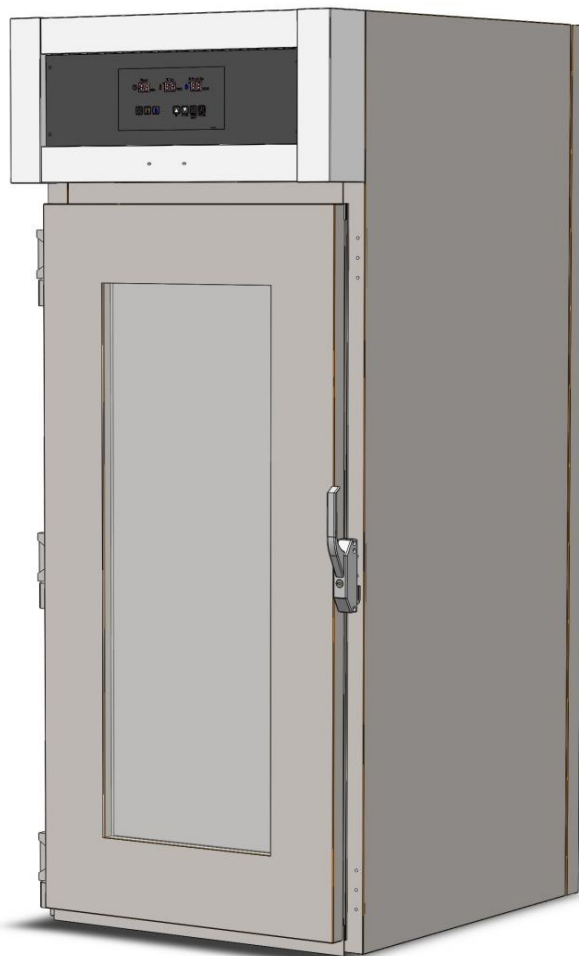

**Model LRP Max-1 shown**

**Construction Features:**

- Heavy duty stainless steel exterior with 300 series stainless steel interior and aluminized steel top
- Foam insulated walls, ceiling and door
- Modular wall and ceiling panels with cam interlocks
- Tubular heaters; non-submerged to extend life
- Lighted interior
- Inner bumpers to protect interior walls and door
- Door can be hinged to open left or right
- 208 - 240VAC, 1 Phase Power

**Performance Features:**

- Rapid responding air-wash heat and humidity system
- Proofing Heat Range: 70 - 120 deg F
- Humidity Range: 50 - 99%
- PID-type controller design to ensure rapid and accurate response without overshoot

**Controls Features:**

- Controller is mounted above the door
- Large LED displays for Time, Temperature and Humidity

**Accessory:** 72610-48 Water Filtration System

**Short Bid Specification:**

Proofer shall be an **LBC Bakery Equipment Model LRP Max-1**.

Appliance shall be electrically heated with a single door, a quick response air-wash heat and humidity system and modular foam-insulated panel construction. Interior shall be 300 series stainless steel with perimeter bumpers to protect door and walls. Door shall have a magnetic seal and a mechanical latch closer. Door shall have double pane full view glass window. Computerized controller shall be mounted at eye-level with accurate LED displays for Time, Temperature and Humidity. Complete appliance shall have all features listed and, if selected, optional 300-series stainless steel floor and/or 72610-48 water filtration system.

**Standard Product Warranty:**

One Year Parts and Labor (Contiguous US, Alaska, Hawaii and Canada)

Sheet Number LRP Max-1 (Rev A 2-17)


## Roll-In Proofer for LMO Max Oven Rack

**LRP Max-1**

### Installation Requirements:

- Ships Assembled, Factory authorized start-up required
- Appliance is designed to operate at normal room temperatures
- Clearance to combustibles is 0" sides and back
- Floor must be level to within 1/8" per foot. Difference for entire floor must not exceed 1/4".
- For installation on non-porous surfaces only
- Water Supply: 1/2NPT connection on appliance side, cold water, filtered
- Drain: 3/4" copper vented drain connection required

**Accessory:** 72610-48 Water Filtration System

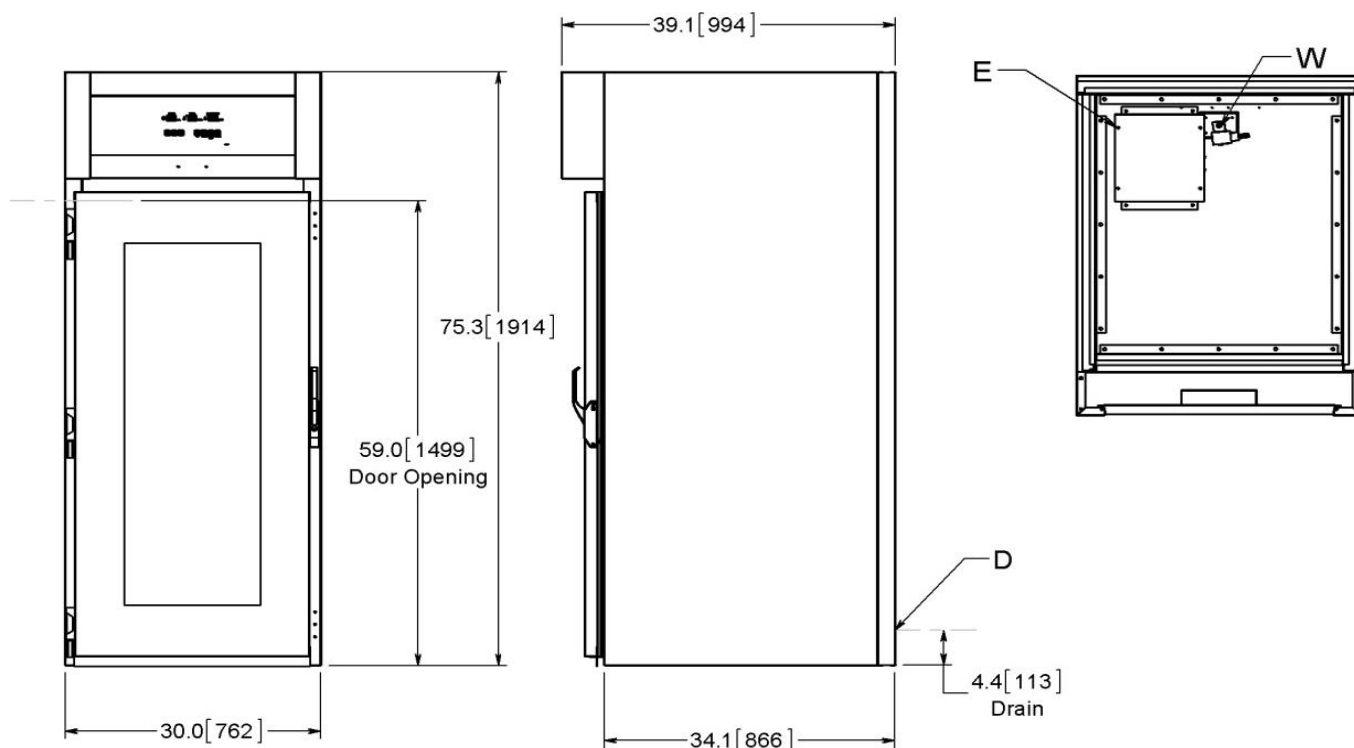

### Dimensions:

Model	Width (in)	Length (in)
LRP Max-1	30.0	34.1

### Shipping Info:

Weight (lb)		Freight Class
Actual	Shipping	
250	350	85

### Electrical Requirements:

Voltage	Total kW	MCA	MOP
208	3.3	20	25
240	4.4	23	30

### Water Quality Requirements:

Alkalinity < 22 ppm	Magnesium < 0.65 ppm
Aluminium < 17 ppb	pH = 8.5
Calcium < 3.3 ppm	Sodium < 8.5 ppm
Free Chlorine Residual < 0.6 ppm	Total Hardness < 11.9 ppm