

Item No.	
Project	
Quantity	

BakerSeries Roll-in Oven Racks -- Single Side-Load

LRR-1-26-__ Series



LRR-1-26-20 Shown

Production Capacity Guide:

	LRR-1-26-10	LRR-1-26-15	LRR-1-26-20
18 x 26 Sheet Pans	10	15	20
Pies (9 in dia)	30	45	NA
1# 5-Strap Bread	100	NA	NA
1 1/2# 5-Strap Bread	50	NA	NA
Cookies (Small)	16 Doz.	25 Doz.	33 Doz.

Short Bid Specification:

Roll-in Oven Rack shall be an LBC Bakery Equipment, Inc.

LRR-1-26— [Insert:10,15 or 20] single side-load. Oven Racks shall be constructed of 18 gage stainless steel, welded at each slide to a square tubular stainless steel frame and electro-polished to remove weld discoloration. Casters shall be high temperature design, able to withstand up to 600 deg F and shall include a non-metalic, composite wheels with Rulon type bearing inserts. All fasteners shall be stainless steel. Oven racks shall be reinforced at bottom frame to minimize rack sway when fully loaded. Racks shall be shipped KD and shall be assembled on site. Racks shall fit either single or double rack ovens by changing top configuration on site.

Standard Product Warranty: N/A

Construction Features:

- Designed for standard 18 x 26 sheet pans and five-on strap pans
- Heavy-duty stainless steel construction
- Electro-polished annealed finish
- 4" high-temperature, non-metallic swivel casters rated to 600 deg F
- · Casters rated to 500 lbs each
- Rulon bearing inserts at wheel axles
- Fits standard "B" style lift systems
- Shipped knocked down for reduced freight class
- Designed for Single or Double Rack Ovens

Sheet Number LRR-1-26-SSL Spec (RevE 2-17)



BakerSeries Roll-in Oven Racks -- Single Side-Load

LRR-1-26-__ Series


Requirements:

- Racks are designed for Single or Double Rack Ovens
- Racks are shipped knocked down. Field assembly is required.
- Caster swivel bearings require periodic lubrication with #2 food-grade grease
- Rack spacing must allow 1-1/2" minimum clearance above finished food product

Options -- check box(es) as required:

Factory pre-assembled rack

Correctional Configuration: Fully welded rack -- including fasteners

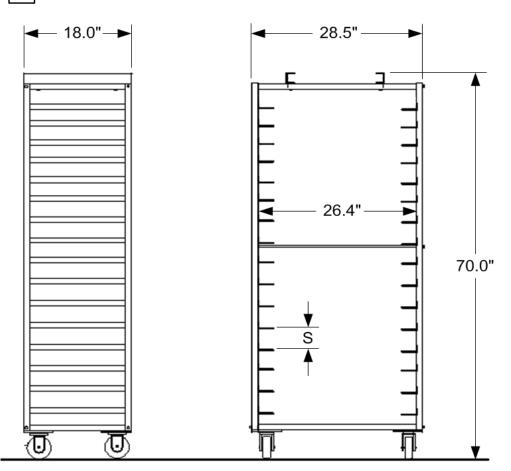

Slide Spacing and Shipping Info:

Model	Slide Spacing (S)	Shipping Weight	Freight Class
LRR-1-26-10	6.0"	96 lbs	
LRR-1-26-15	4.0"	108 lbs	70
LRR-1-26-20	3.0"	123 lbs	