

Item No.: _____

Project: _____

Quantity: _____

Proofer Base - Electric

Model LMO-P



LMO-P Proofer



Short Bid Specification:

Proofer shall be an **LBC Bakery Equipment Model LMO-P**, 0.9 kW, electrically heated, double door proofer base with 4" swivel casters (front casters lock). Intended for use with the LMO-E or LMO-G Mini Rack Oven. 12 ea rack slides. Simple door-mounted computerized controls with large displays for temperature, humidity and time. Heavy-duty doors with magnetic seals and closure system. Quick response air-wash and humidity system. Fully foam insulated walls, floor, ceiling and doors. Stainless steel interior and exterior construction. NEMA 5-15 cord and plug are pre-installed. Also includes all features listed on spec sheet and options selected.

Standard Product Warranty:

One Year Parts and Labor (Contiguous US, Alaska, Hawaii & Canada)

Construction Features:

- Heavy-duty stainless steel interior and exterior
- Walls, floor, ceiling and doors are fully foam insulated
- Rapid responding air-wash heat and humidity system
- Supplied with 6' cord and NEMA 5-15 plug
- 4" swivel casters with locks on both front casters; also supplied with 6" adjustable feet

Performance Features:

- Proofer Capacity: 12 ea 18" x 26" sheet pans
- 70 - 120 deg F temperature range
- 50 - 99% humidity range
- Non-submerged tubular heaters

Control Features:

- Simple and intuitive design
- Control conveniently located in right hand door
- PID feedback design for rapid and accurate response with no temperature overshoot
- Large LED displays for Temperature, Humidity and Time

Proofer Base - Electric


Model LMO-P

Installation Requirements:

- Factory authorized start-up required
- **Drain (D):** 3/4"NPT connect point, route to air gap drain
- **Electrical (E):** 120VAC, 1ph, 60Hz, 15A dedicated circuit
 - 6' cord and NEMA plug are pre-installed
- **Water (W):** 3/8"NPT connect point, cold, 3/4 gph @ 20 psi

Accessories:

- 74000-51** 60" Water Connection Kit — 3/8"NPT flex line with shutoff, NSF
- 72610-48** Water Filtration Assembly
- 72610-55** Drain Line Kit — 3/8"NPT, flexible, 10' long with clamp

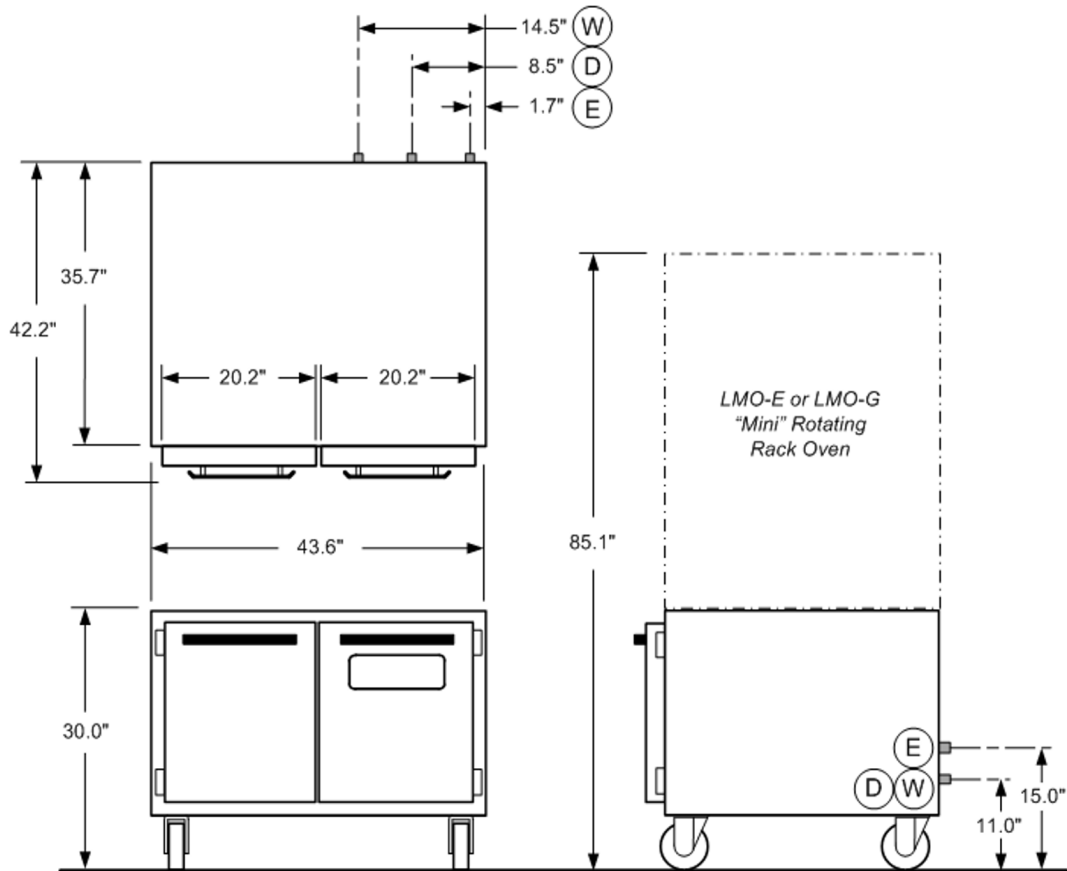

Minimum Water Quality Requirements:

Alkalinity < 22 ppm	Magnesium < 0.65 ppm
Aluminum < 17 ppm	pH = 8.5
Calcium < 3 ppm	Sodium < 8.5 ppm
Free Chlorine Radical < 0.6 ppm	Total Hardness < 11.9 ppm

Shipping Information:

Crate H x W x D	Ship Weight	Freight Class
36"H x 48"W x 45"D	425 lbs	85