

Roll-In Proofer for LRR-Max Oven Racks

Model LRP Max-1



LRP Max-1 (rack not included)



Meets UL 197 and NSF 2 Standards

Short Bid Specification:

Proofer shall be an **LBC Bakery Equipment Model LRP Max-1**. Appliance shall be electrically heated with a single door, a quick response air-wash heat and humidity system and modular foam-insulated panel construction. Floor and interior shall be 300 series stainless steel with perimeter bumpers to protect door and walls. Door shall have a magnetic seal and a mechanical latch closer. Door shall have double pane full view glass window. Computerized control shall be door mounted at eye-level with accurate LED displays for Time, Temperature and Humidity. Complete appliance shall have all features listed and, if selected, optional 72610-48 water filtration system and/or LRR-Max oven racks.

Standard Product Warranty:

One Year Parts and Labor (Contiguous US, Alaska, Hawaii & Canada)

Rack Capacity:

- One LRR-Max rack

Construction Features:

- Heavy-duty stainless steel exterior with 300 series stainless steel interior and aluminized steel top
- Foam-insulated walls, ceiling and doors
- Modular wall and ceiling panels with cam interlocks
- Tubular heaters; non-submerged to extend life
- Lighted interior
- Inner bumpers to protect interior walls and doors
- Door can be hinged to open left or right
- 208/240VAC 1-phase power

Performance Features:

- Rapid responding air-wash heat and humidity system
- Proofing Heat Range: 70-120 deg F
- Humidity Range: 50-99%
- PID-type controller design to ensure rapid and accurate response without overshoot

Control Features:

- Control is mounted above the door
- Large LED displays for Time, Temperature, and Humidity

Options and Accessories:

- 72610-48 Water Filtration System
- 8, 12 or 16-pan racks (sold separately)

Roll-In Proofer for LRR-Max Oven Racks


Model LRP Max-1

Installation Requirements:

- Factory authorized start-up required
- Ships assembled
- Appliance is designed to operate at normal room temperatures
- Clearance to combustibles is 0" sides and back
- Floor must be level to within 1/8" per foot. Difference for entire floor must not exceed 1/4"
- For installation on non-porous surfaces only

Options and Accessories:

- 72610-48 Water Filtration Assembly
- LRR-MAX-16, 16-Pan Rack (3" spacing)
- LRR-MAX-12, 12-Pan Rack (4" spacing)
- LRR-MAX-8, 8-Pan Rack (6" spacing)

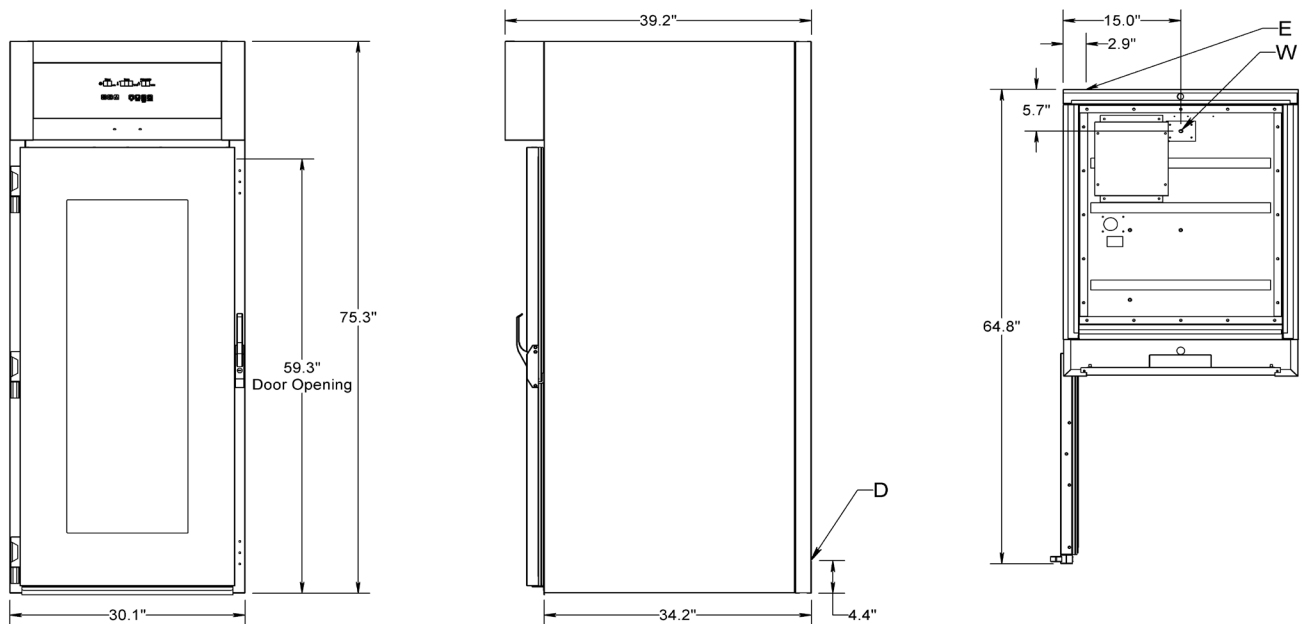

Minimum Water Quality Requirements:

Alkalinity < 22 ppm	Magnesium < 0.65 ppm
Aluminum < 17 ppm	pH = 8.5
Calcium < 3 ppm	Sodium < 8.5 ppm
Free Chlorine Radical < 0.6 ppm	Total Hardness < 11.9 ppm

Utility Requirements:

(E) Voltage	Total kW	MCA	MOP	(W) Water	(D) Drain
208V, 1ph	3.3	20	25	1/2" NPT, cold, filtered	3/4" copper, Route to air gap drain
240V, 1ph	4.4	23	30		

Shipping Information:

Weight (lbs)		Freight Class
Actual	Shipping	
250	600	85