



Manufacturers of Bakery and Foodservice Equipment

Item No. _____

Project _____

Quantity _____

LRC7 Electric Rethermalizing Oven

Model: LRC7



LRC7 Rethermalizer
(shown with LCR7 Rotisserie)

Construction Features

- Stainless steel interior and exterior
- Full view double pane loading door with low-E reflective coating on windows and hinged inner pane for easy cleaning
- Bright interior lighting
- 6 each 21" x 26-1/2" [533mm x 673mm] removeable racks

Performance Features

- Fast acting heater elements
- Interior fans to thoroughly circulate convection air

Control Features

- Temperature Range: 145-480 deg F [63-250 deg C]
- Simple and intuitive layout
- Large displays for Time and Temperature
- Alarm to alert user when actual temperature reaches set point
- Temperature displayable in deg F or deg C
- Set point retained in memory, reappears on subsequent startups
- 99 hour 59 minute timer

Options and Assessories

- 208V 3ph 60Hz (standard) or optional 208V 1ph, 240 1ph or 240V 3ph
- Stackable with LCR7 Rotisserie or another LRC7 Rethermalizer
- Casters (standard) or optional 4" [102mm] countertop legs, 6" [152mm] floor legs or LST7 Stand
- Accessory: MSR7 Mobile Skewer Rack
- Accessory: Chain Restraint Kit

Short Bid Specification

Rethermalizing Cabinet shall be an **LBC model LRC7** electrically heated oven with digital thermostatic control. Control shall have large LED displays for Temp and Time. Oven shall have 6 each 21.0" x 26.5" [533mm x 673mm] removable stainless steel racks with stainless steel side supports to allow vertical positioning. Loading door shall have tempered full view glass with hinged inner pane for cleaning. Complete rethermalizing cabinet shall also include all features listed and options checked.

Standard Product Warranty

1 year parts and labor (contiguous US, Alaska, Hawaii & Canada)



Meets UL197 and NSF4 Standards

Sheet Number LRC7 (Rev B - 5/16)

LBC Electric Rethermalizing Oven


Model: LRC7

Installation Requirement

Each unit ships separately. Stacking may be required.

Options and Accessories (Check as Required)

- | | | |
|--|---|--|
| <input type="checkbox"/> 208V 1ph 60Hz | <input type="checkbox"/> 4" [102mm] countertop legs | <input type="checkbox"/> MSR7 Mobile Skewer Rack |
| <input type="checkbox"/> 240V 1ph 60Hz | <input type="checkbox"/> 6" [154mm] floor legs | <input type="checkbox"/> Chain restraint kit |
| <input type="checkbox"/> 240V 3ph 60Hz | <input type="checkbox"/> LST7 Stand | |

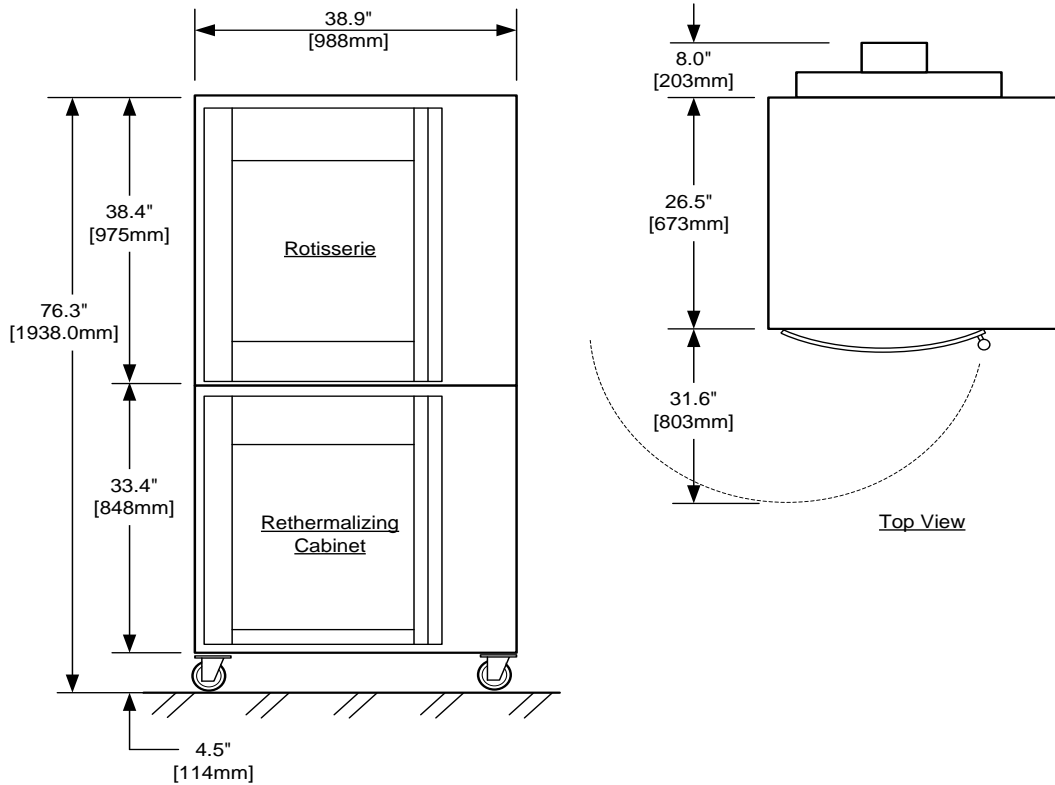

Model	Voltage	kW	Min Circuit Ampacity		Max Breaker Size	
			1 Phase	3 Phase	1 Phase	3 Phase
LCR7 Rotiosserie	208VAC	8.0	55	N/A	60	N/A
	240VAC	8.0	50	N/A	60	N/A
	208VAC	9.0	N/A	40	N/A	60
	240VAC	9.0	N/A	35	N/A	60
LRC7 Rethermalizer	208VAC	8.0	55	N/A	60	N/A
	240VAC	8.0	50	N/A	60	N/A
	208VAC	9.0	N/A	40	N/A	60
	240VAC	9.0	N/A	35	N/A	60

Model	Actual Weight	Ship Weight	Marchandises de Catégorie
LCR7 Rotiosserie	460 lbs [209kg]	610 lbs [277kg]	85
LRC7 Rethermalizer	460 lbs [209kg]	610 lbs [277kg]	85