



Manufacturers of Bakery and Foodservice Equipment

Item No.: _____
 Project: _____
 Quantity: _____

BakerSeries Roll-in Oven Racks -- Single Side-Load

Model LRR-1-26-13FS



**LRR-1-26-13FS Shown
 (pans not included)**

Pan Capacity:

18" x 26" Sheet Pan	13
4" Deep Hotel Pan	26
4" Deep Hotel Pan	26

Short Bid Specification:

Oven Rack shall be an **LBC Bakery Equipment, Inc. Model LRR-1-26-13FS Single-Side Load**. Rack capacity shall be 13 each 18" x 26" sheet pans or 26 each 2" or 4" deep hotel pans. Oven rack slides shall be constructed of 18 gage stainless steel, spaced 4.7" on center and welded at each end to an integral square tube frame. Rack lift assembly shall have a welded square-top frame. Racks shall be reinforced at bottom frame to minimize rack sway when fully loaded. All welds shall be electro-polished to remove weld discoloration. Casters shall be of high temperature construction and able to withstand temperatures up to 600 deg F and shall include non-metallic, composite wheels with Rulon bearing inserts. All fasteners shall be stainless steel. Oven racks shall be reinforced at the bottom frame to minimize rack sway when fully loaded. Racks shall be shipped KD and shall be assembled on site. Racks shall fit either single or double rack ovens by changing top configuration on site.

Standard Product Warranty: N/A

Construction Features:

- Designed for standard 18 x 26 sheet pans and 2" deep and 4" deep hotel pans
- Heavy-duty stainless steel construction
- Electro-polished annealed finish
- 4" high-temperature, non-metallic swivel casters rated to 600 deg F
- Casters rated to 500 lbs each
- Rulon bearing inserts at wheel axles
- Fits standard "B" style lift systems
- Shipped knocked down for reduced freight class
- **Can be used for Single or Double Rack Ovens by re-configuring the top frame on site**


Sheet Number LRR-1-26-13FS-SSL (RevD 2-17)

Requirements:

- Racks are designed for Single or Double Rack Ovens by re-configuring the top frame on site
- Racks are shipped knocked down. Field assembly is required.
- Caster swivel bearings require periodic lubrication with #2 food-grade grease
- Rack spacing must allow 1-1/2" minimum clearance above finished food product

Options -- check box(es) as required:

- Factory pre-assembled rack
- Correctional Configuration: Fully welded rack -- including fasteners

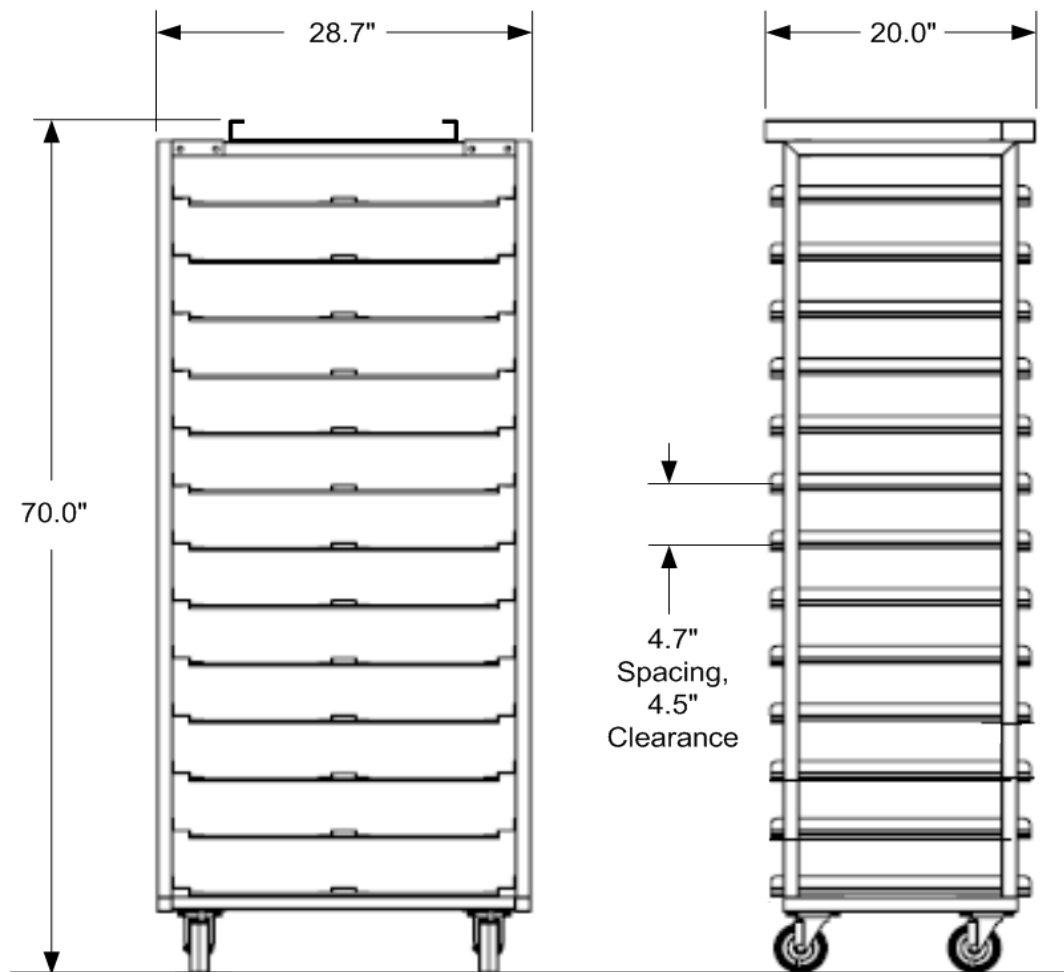

Shipping Info:

- Shipping Weight = 108 lbs
- Freight Class: 70