

Item No.: \_\_\_\_\_

Project: \_\_\_\_\_

Quantity: \_\_\_\_\_

**Roll-In Proofer — Pass Through, Four Door, 102.5" Wide Series LRP3-130P to -240P**



LRP3-130P (rack not included)



Meets UL 197 and NSF 2 Standards

**Short Bid Specification:**

Proofer shall be an **LBC Bakery Equipment Model LRP3-\_\_P** (insert 130, 140, 150, 160, 170, 180, 190, 200, 210, 220, 230 or 240 to indicate desired depth). Appliance shall be electrically heated with four doors, a quick response air-wash heat and humidity system and modular foam-insulated panel construction. Interior shall be 300 series stainless steel with perimeter bumpers to protect doors and walls. Doors shall have magnetic seals, automatic closers and full-width protective bar handles. Computerized control(s) shall be door mounted at eye-level with accurate LED displays for Time, Temperature and Humidity. Complete appliance shall have all features listed and, if selected, optional 300-series stainless steel floor and/or 72610-48 water filtration system.

**Standard Product Warranty:**

One Year Parts and Labor (Contiguous US, Alaska, Hawaii & Canada)

**Rack Capacity:**

Model	Side Load	End Load	Double
LRP3-130P	18	16	9
LRP3-140P	21	20	9
LRP3-150P	21	20	12
LRP3-160P	24	20	12
LRP3-170P	27	24	12
LRP3-180P	27	24	12
LRP3-190P	30	28	15
LRP3-200P	30	28	15
LRP3-210P	33	28	15
LRP3-220P	33	32	15
LRP3-230P	36	32	15
LRP3-240P	36	32	18

**Construction Features:**

- Heavy-duty stainless steel exterior with 300 series stainless steel interior and aluminized steel top
- Foam-insulated walls, ceiling and doors
- Modular wall and ceiling panels with cam interlocks
- Tubular heaters; non-submerged to extend life
- Lighted interior
- Inner bumpers to protect interior walls and doors
- 208/240VAC 3-phase power, field convertible

**Performance Features:**

- Rapid responding air-wash heat and humidity system
- Proofing Heat Range: 70-120 deg F
- Humidity Range: 50-99%
- PID-type controller design to ensure rapid and accurate response without overshoot

**Control Features:**

- Control(s) mounted in the door(s) at eye-level
- Large LED displays for Time, Temperature, and Humidity
- Five unique timers to manage multiple products simultaneously

**Options and Accessories:**

- Rugged 300-series stainless steel floor
- 72610-48 Water Filtration System

**Roll-In Proofer — Pass Through, Four Door, 102.5" Wide Series LRP3-130P to -240P**


**Installation Requirements:**

- Factory authorized start-up required
- Ships knocked down. Requires on-site assembly
- Appliance may require external support
- Appliance is designed to operate at normal room temperatures
- Clearance to combustibles is 0" along sides
- Floor must be level to within 1/8" per foot. Difference for entire floor must not exceed 3/4"
- For installation on non-porous surfaces only

NOTE: Deeper units require additional water and electrical connections. Refer to the Utility Requirements table below.

**Options and Accessories:**

- Stainless Steel Floor
- 72610-48 Water Filtration Assembly

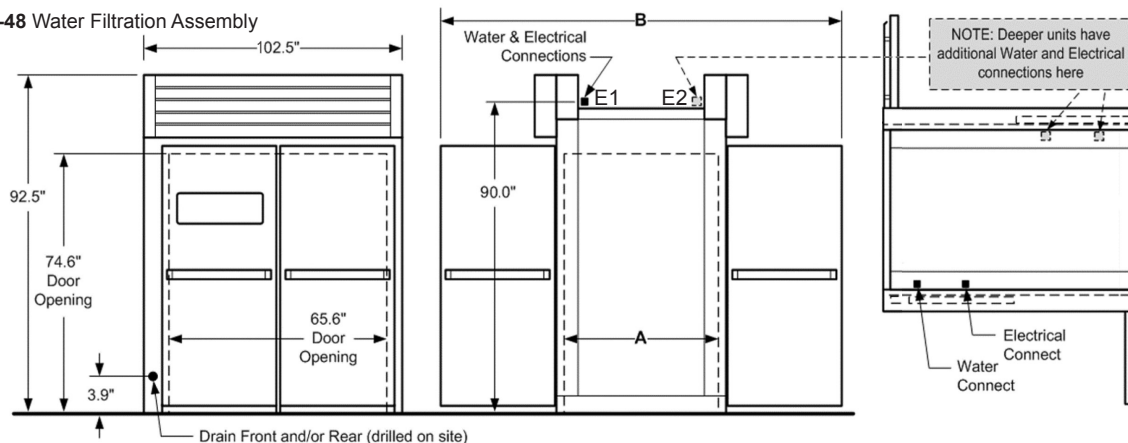

**Dimensions:**

Model	Dim A (in)	Dim B (in)
LRP3-130P	129.1	226.8
LRP3-140P	139.1	236.8
LRP3-150P	149.1	246.8
LRP3-160P	159.1	256.8
LRP3-170P	169.2	266.9
LRP3-180P	179.2	276.9
LRP3-190P	189.2	286.9
LRP3-200P	199.2	297.0
LRP3-210P	209.2	307.0
LRP3-220P	219.2	317.0
LRP3-230P	229.3	327.0
LRP3-240P	239.3	337.0

**Shipping Information:**

Weight (lbs)		Freight Class
Actual	Shipping	
1574	3241	85
1582	3381	
1672	3491	
1762	3601	
1770	3741	
1860	3851	
2006	4138	
2014	4278	
1204	4388	
1294	4498	
2202	4638	
2292	4748	

**Minimum Water Quality Requirements:**

Alkalinity < 22 ppm	Magnesium < 0.65 ppm
Aluminum < 17 ppm	pH = 8.5
Calcium < 3 ppm	Sodium < 8.5 ppm
Free Chlorine Radical < 0.6 ppm	Total Hardness < 11.9 ppm

**Utility Requirements:**

Model	Voltage	Phase	Total kW	E1 Front		E2 Rear		Water	Drain(s)
				MCA	MOP	MCA	MOP		
LRP3- (130P to 150P)	208	3	15.2	35	60	20	50	1/2" NPT, cold, filtered	3/4" copper, Route to air gap drain(s)
	240		19.9	39	60	20	50		
LRP3- (160P to 240P)	208		20.4	35	60	35	60		
	240		26.4	39	60	39	60		