

Retarder Proofer — Two Door, Remote Refrigeration

Series LRPR3-HO



LRPR3-30HO (Rack not included)



Meets UL 197 and NSF 2 Standards

Short Bid Specification:

Proofer Retarder shall be an **LBC Bakery Equipment Model LRPR3-__HO** (insert 30, 40, 50, 60, 70, 80, 90, 100, 110 or 120 to indicate desired depth). Appliance shall be a triple-wide roll-in rack unit, electrically heated (5 to 13.2 kW) with double doors, a quick response air-wash heat and humidity system, high output refrigeration system that includes the solenoid valve(s), expansion valve(s), line dryer(s) and epoxy coated evaporator coils, and modular foam-insulated panel construction. Interior shall be 300 series stainless steel with perimeter bumpers to protect door and walls. Doors shall have a magnetic seal, automatic closers and full-width protective bar handles. Computerized control shall be door mounted at eye-level with accurate LED displays for Time, Temperature and Humidity. Complete appliance shall have all features listed and, if selected, optional 300-series stainless steel floor and/or 72610-48 water filtration system. **Requires remote refrigeration by others. Optional refrigeration condensers are also available.**

Standard Product Warranty:

One Year Parts and Labor (Contiguous US, Alaska, Hawaii & Canada)

Rack Capacity:

Model	Side Load	End Load	Double
LRPR3-30HO	3	4	N/A
LRPR3-40HO	3	4	3
LRPR3-50HO	6	4	3
LRPR3-60HO	9	8	3
LRPR3-70HO	9	8	3
LRPR3-80HO	12	8	6
LRPR3-90HO	12	12	6
LRPR3-100HO	15	12	6
LRPR3-110HO	15	16	6
LRPR3-120HO	18	16	9

Construction Features:

- Heavy-duty stainless steel exterior with 300 series stainless steel interior and aluminized steel top
- Foam-insulated walls, ceiling and door
- Modular wall and ceiling panels with cam interlocks
- Tubular heaters; non-submerged to extend life
- Lighted interior
- Inner bumpers to protect interior walls and doors
- High capacity refrigeration system with epoxy coated evaporator coils
- 208 or 240 VAC single or 3-phase power, field convertible
- Refrigeration components compatible with R404A refrigerant

Performance Features:

- Dual purpose, provides both proofing and retarding
- Rapid responding air-wash heat and humidity system
- Proofing Temperature Range: 70-120 deg F
- Retarding Temperature Range: 34-45 deg F
- Humidity Range: 50-99%
- Evaporators sized for high humidity levels to prevent drying of product
- Refrigeration system sized for rapid pull-down
- PID-type controller design to ensure rapid and accurate response without overshoot

Control Features:

- Control is mounted in the door at eye-level
- Large LED displays for Time, Temperature, and Humidity

Options and Accessories:

- Rugged 300-series stainless steel floor
- 72610-48 Water Filtration System
- **Refrigeration Condenser (sold separately)**

Retarder Proofer — Two Door, Remote Refrigeration

Series LRPR3-HO

Installation Requirements:

- Factory authorized start-up required
- Ships knocked down. Requires on-site assembly
- Appliance is designed to operate at normal room temperatures
- Should not be installed within 4" of oven or other heat source to prevent heat transfer
- Clearance to combustibles is 0" sides and back
- Floor must be level to within 1/8" per foot. Difference for entire floor must not exceed 3/4"
- For installation on non-porous surfaces only


Note: Refrigeration system requires installation by a licensed refrigeration technician

Options and Accessories:

Stainless Steel Floor

72610-48 Water Filtration Assembly

Refrigeration Condenser

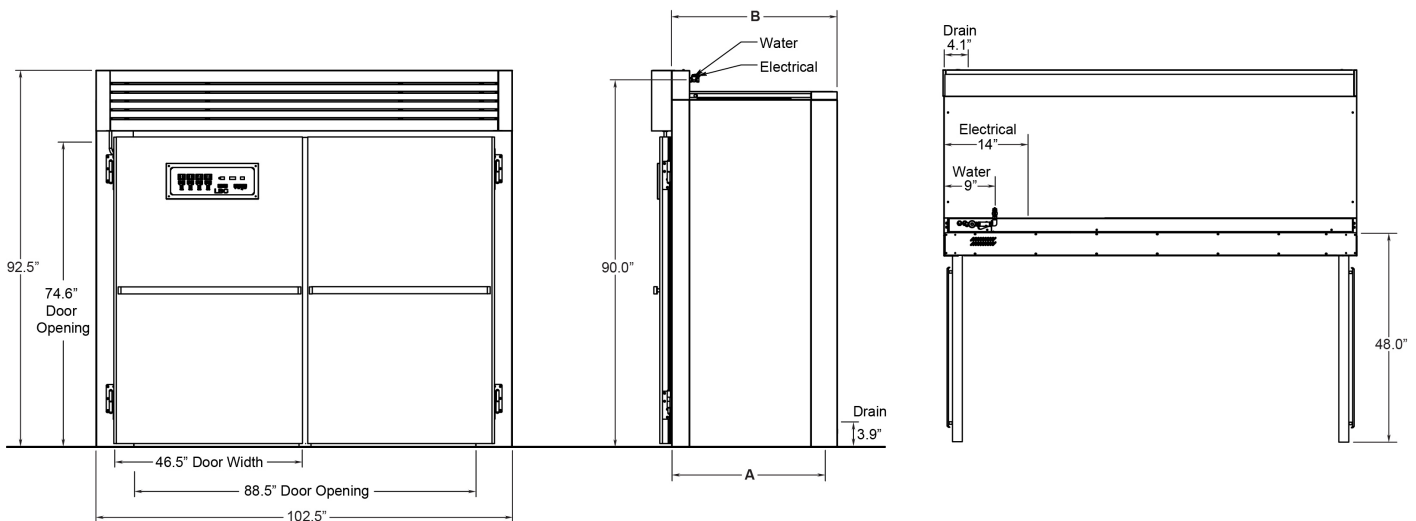

Utility Requirements:

Model	Cooling *		Heating * (6.0 kW max)			Retarder kBTU @ 35 deg F †	Optional Refrigeration Condenser
	MCA	MOP	MCA 1 ph	MCA 3 ph	MOP		
LRPR3-30HO	9	20	35	20	50	7.0	91500-18
LRPR3-40HO	13	20	35	20	50	9.0	91500-01
LRPR3-50HO	13	20	35	20	50	9.0	91500-01
LRPR3-60HO	15	20	35	20	50	11.0	91500-21
LRPR3-70HO	15	20	35	20	50	11.0	91500-21
LRPR3-80HO	16	20	N/A	40	60	15.0	91500-17
LRPR3-90HO	16	20	N/A	40	60	15.0	91500-17
LRPR3-100HO	16	20	N/A	40	60	15.0	91500-17
LRPR3-110HO	16	20	N/A	40	60	19.0	91500-34
LRPR3-120HO	16	20	N/A	40	60	19.0	91500-34

† The thermal rating is to be used for sizing a condenser (by others) and is therefore not a direct utility requirement for this appliance.

* 2 separate electrical supplies required.

Note: The height may increase to 107.0" overall if an LBC optional condenser is purchased and installed on top of the appliance.

Minimum Water Quality Requirements:

Alkalinity < 22 ppm	Magnesium < 0.65 ppm
Aluminum < 17 ppm	pH = 8.5
Calcium < 3 ppm	Sodium < 8.5 ppm
Free Chlorine Radical < 0.6 ppm	Total Hardness < 11.9 ppm

Note: Your local water conditions may damage your LBC appliance. Failure to properly treat water may result in damage and may void your warranty. Ensure that your water supply meets these minimum water quality specifications.

Dimensions:

Dim A (in)	Dim B (in)
39.0	41.1
49.0	51.1
59.0	61.1
69.9	71.1
79.0	81.1
89.0	91.1
99.0	101.1
109.0	111.1
119.0	121.1

Shipping Information:

Weight (lbs)		Freight Class
Actual	Shipping	
1172	1472	85
1282	1582	
1422	1722	
1532	1832	
1642	1942	
1982	2282	
2269	2569	
2379	2679	
2619	2919	
2729	3029	

Water Requirements:

Water	Drain
1/2" NPT, cold, filtered 0.07 gpm @ 60 psi	3/4" copper, Route to air gap drain